


TM600

Real time flow monitor

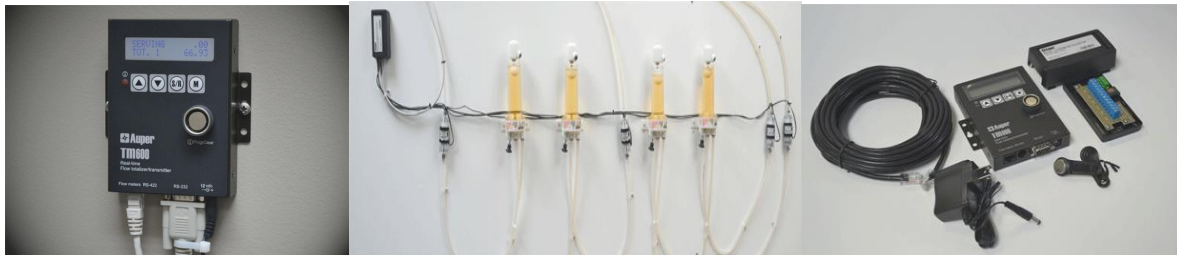

Up to **6 flow meters** per system. Flow meter collector box can be installed in a cooler. Can measure ounces, litres or any other measuring unit. Display shows the amount being **served in real-time** and the total for the day.

Daily counters can be cleared using the user/manager ibutton key.

Totalizers hold the amounts measured to date (resetable by manager only).

LED will flash in case of power loss. Can **print daily usage reports** to a serial printer. Can be connected to a computer to use the Draft Manager Live software. Up to 4 manager keys and 4 user keys to access the system at different levels.

SPECIFICATIONS

Dimensions : 3" 5/8 W X 5" H X 1" D

92 mm W X 126 mm H X 24 mm D

Shipping Weight : 2.2 lbs / 1Kg

Communication : RS-232 null modem/RS-422

Connectors : RS-232 dbsub 9 male - RS-422 RJ11

Flow meters RJ45 - Power 2.1 X 5.5mm barrel

Flow meter collector cable : UTP Cat 5 four pairs cable

Maximum cable length : 1000 ft / 300M

Power supply : 12 Volts DC@ 0.65 Amp